




Exclusive Integrations from
ExMachina Water Systems



Hydropack / 500L

500 Liter
Air to Water Generator

HOW IT WORKS

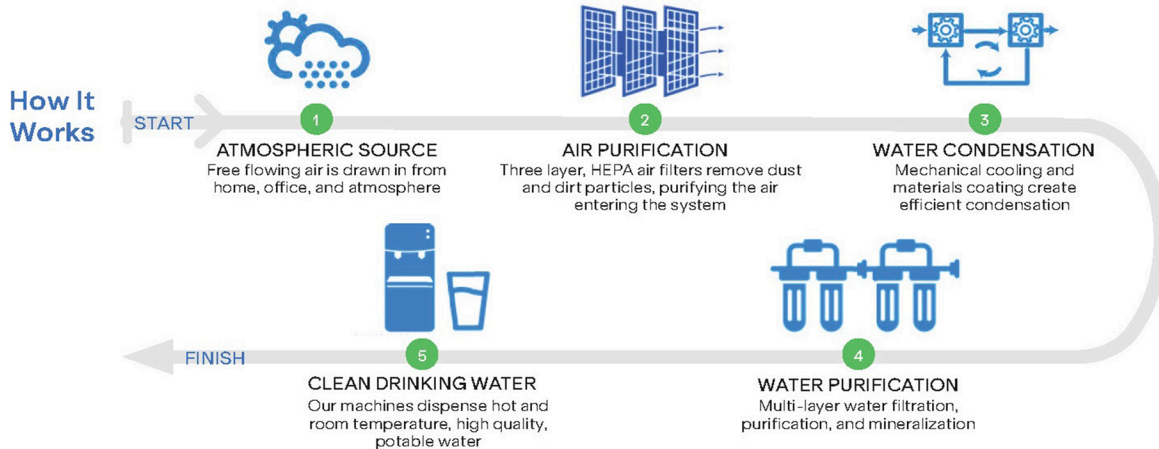

SPECIFICATIONS OF HYDROPACK 500

Power Supply: 240V / 380V | 3N

Operating Power: 6.5Kw

Frequency: 50Hz/60Hz

Production Capacity: 500L per day @ working conditions of 30°C & 80% relative humidity

Working Conditions

Production capacity of 500L per day

Climate Conditions Range - $\geq 15^{\circ}\text{C}$

Humidity - $\geq 25\% \text{ RH}$

Water Tank


266L (internal storage tank)

Net Weight

1565 Lbs

Size (LxWxH)

50" x 54" x 69"

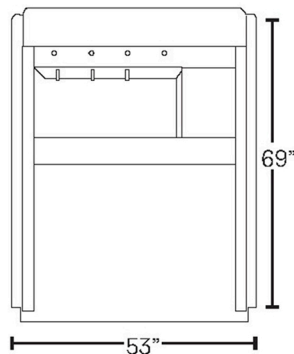

Energy Efficiency: 275Wh/L

Water pH: 6.5 - 8.5

Refrigerant: R410a

Dispensing Options: None

Operation Sound Level: $\leq 52\text{Db}$

Certifications:

Water Quality certified by Amlabs Intertek

Warranty:

5-year limited warranty for Aquaria AWGs

International Standards:

The quality of water produced exceeds EPA and WHO water quality standards.



ExMachina Water Systems, llc
74-4746 Waiha Loop
Kailua-Kona, Hawaii 96740
808-756-3509

Copyright 2024 - ExMachina Water Systems, llc

